


1 1/4" Rectangular Multi-Turn Cermet






FEATURES


- 0.5 W at 70 °C
- Unique "T" slider block design
- CRV of 3 % or 3 Ω
- RT tolerance ± 10 % STD (± 5 % available)
- Tests according to CECC 41 000

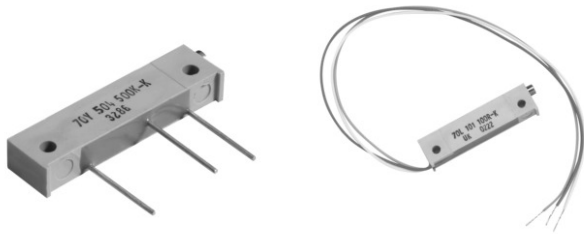

DIMENSIONS in inches (millimeters)

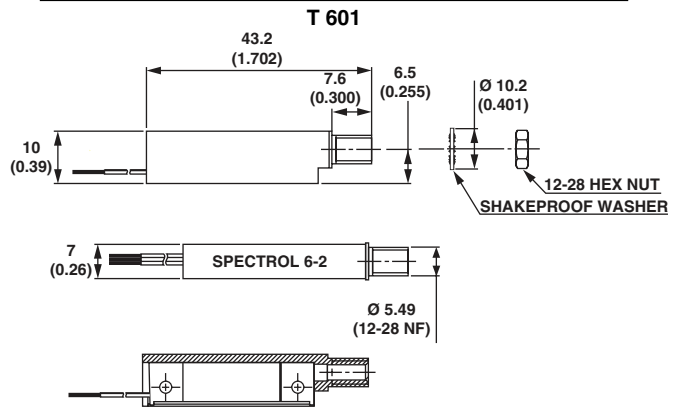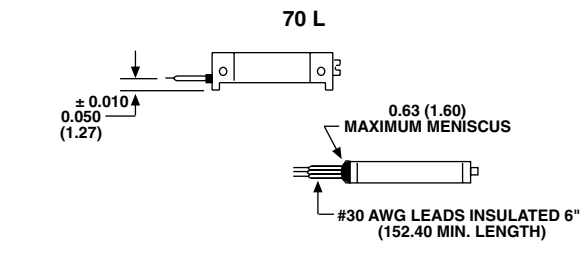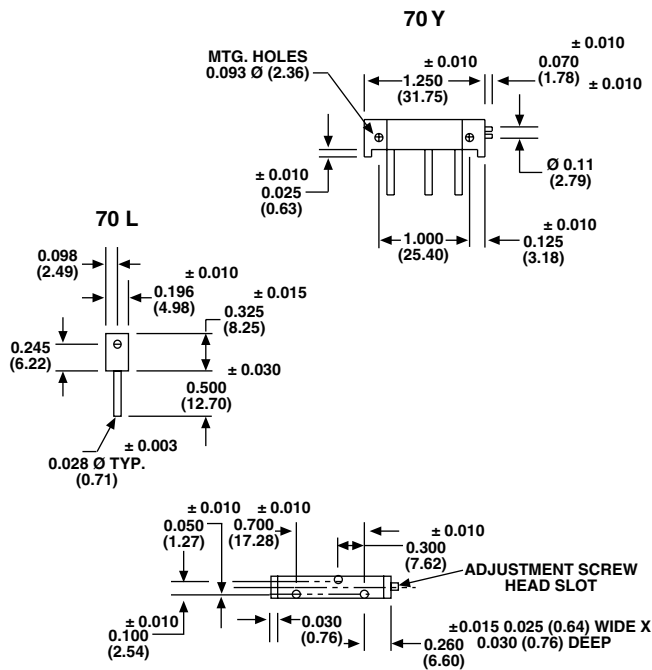

CIRCUIT DIAGRAM



Tolerances unless otherwise specified ± 0.5 mm

ELECTRICAL SPECIFICATIONS	
Resistance Range	10 Ω thru 2 MΩ
Standard Resistance Tolerance	10 %
End Resistance	2 % maximum
Actual Effective Electrical Travel	20 turns nominal
Contact Resistance Variation	3 % or 3 Ω, whichever is greater
Dielectric Withstanding Voltage	1000 VAC at sea level, 350 VAC at 80 000 feet (24.400 meters)
Insulation Resistance	1000 MΩ
Power Rating	0.5 W at 70 °C derated linearly to zero watts at 125 °C (100 °C for leadwire style) maximum voltage not to exceed 350 V
Temperature Coefficient of Resistance (Typical)	± 100 ppm/°C



MECHANICAL SPECIFICATIONS	
Operating Torque	5 oz. in (3.60 Ncm) maximum
Rotational Life	200 cycles with loaded circuit, maximum change in resistance 2 % or 500 cycles without discontinuity unloaded
Weight	0.116 oz. (3.3 g) maximum

ENVIRONMENTAL SPECIFICATIONS			
TESTS	CONDITIONS	TYPICAL VALUES AND DRIFTS	
		$\Delta RT/RT$ (%)	$\Delta R_{1-2}/R_{1-2}$ (%)
Operating Temperature Range	- 55 °C to + 125 °C (100 °C for leadwire style)	-	-
Terminal Strength	2 lbs (9 N) minimum push/pull	-	-
Sealed	All units sealed to permit cleaning in common solvents immersion	-	-
Thermal Shock	- 55 °C to + 125 °C, 5 cycles (100 °C for leadwire style)	1 %	1 %
Shock	50 g at 11 ms, 3 successive shocks in 3 directions	1 %	1 %
Vibration	10 - 55 Hz 0.75 mm or 10 g for 6 h	1 %	1 %
Load Life	1000 h at rater power 90°/30°	1 %	5 %
High Temperature Exposure	+ 125 °C (100 °C for leadwire style)	1 %	5 %
Resistance to Solder Heat	350 °C for 3 s	1 %	-

MARKING

Unit Identification: Manufacturer's name and part number including EIA resistance code, date code, circuit diagram and military style designation as applicable.

ORDERING INFORMATION (Part Number 15 digits)														
M	7	0	L	1	0	3	K	B	2	5				
MODEL		STYLE		OHMIC VALUE		TOLERANCE		PACKAGING CODE		SPECIAL NUMBER				
		L = Leadwire Y = Printed circuit pins		From 10 Ω to 2 M Ω 103 = 10K		K = 10 % On request: J = 5 %		B25 = Box 50 pieces		(If applicable) Given by VISHAY for custom designer				

PART NUMBER DESCRIPTION (for information only)						
70	L	10K	10 %		BO50	e3
MODEL	STYLE	VALUE	TOLERANCE	SPECIAL	PACKAGING	LEAD (Pb)-FREE



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.