

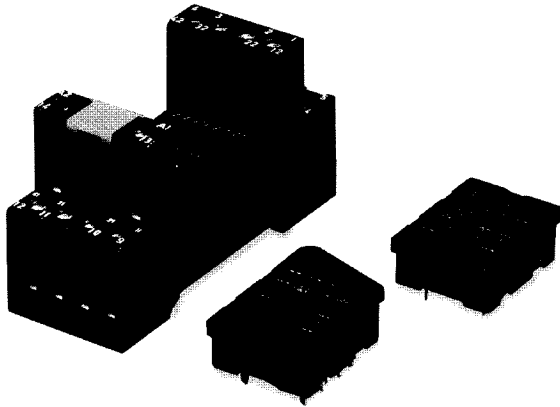


# Accessories Miniature Relay ZT

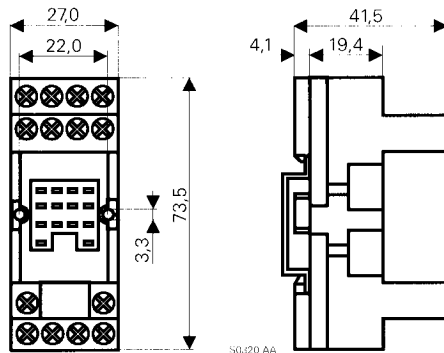

**ZG 78 700** DIN rail socket with screw-type terminals, 4 pole

**ZG 78 110** Socket with protection diode 1N4007





Retaining clip **ZG 28 801**



### Technical data

Rated current	5 A
Rated voltage	300 Vac
Dielectric strength coil/cont.	>3000 V <sub>rms</sub>
Insulation cat. (VDE 0110b)	C / 250 Vac
Ambient temperature	-45...+70 °C
Protection category	IP 20
Protection against accidental contact meets	VBG 4
Wire cross section	2 x 2.5 mm <sup>2</sup>
with bootlace crimp	2 x 1.5 mm <sup>2</sup>
Terminal torque	0.5 Nm
max.	0.7 Nm
Packaging unit	25 pcs.

**RA 787 28** DIN rail socket with screw-type terminals, 4 pole

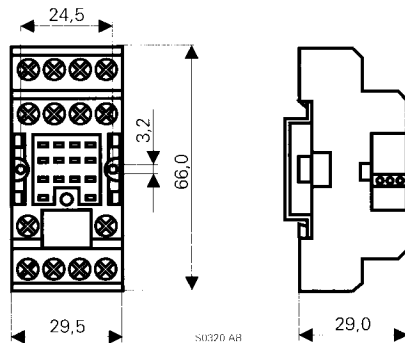

Retaining clip included





### Technical data

Rated current	5 A
Rated voltage	300 Vac
Dielectric strength coil/cont.	>3000 V <sub>rms</sub>
Insulation cat. (VDE 0110b)	C / 250 Vac
Ambient temperature	-45...+70 °C
Protection category	IP 20
Protection against accidental contact meets	VBG 4
Wire cross section	2 x 2.5 mm <sup>2</sup>
with bootlace crimp	2 x 1.5 mm <sup>2</sup>
Terminal torque	0.5 Nm
max.	0.7 Nm
Packaging unit	25 pcs.

Dimensions in mm

# Accessories Miniature Relay ZT

## ZG 78 750 Socket with solder terminals, 4 pole

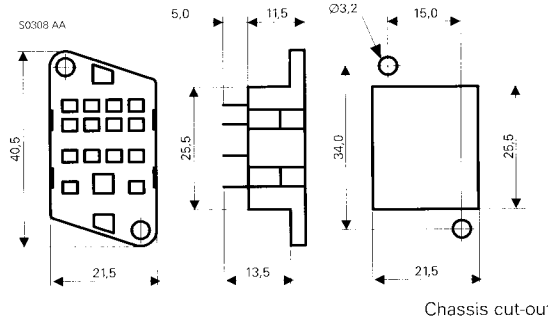



### Technical data

Rated current	5 A
Rated voltage	250 Vac
Dielectric strength coil/cont.	>1500 V <sub>rms</sub>
Ambient temperature	-40...+70 °C
Packaging unit	25 pcs.

Retaining clip **ZG 28 800**

Chassis cut-out

## ZG 78 752 Socket with PCB terminals, 4 pole

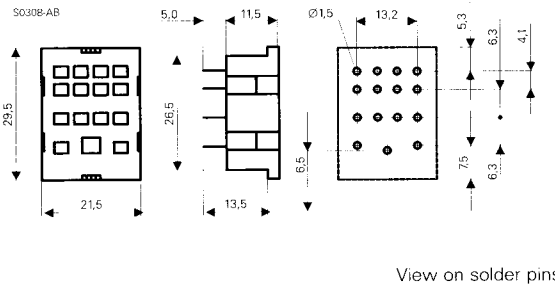



### Technical data

Rated current	5 A
Rated voltage	250 Vac
Dielectric strength coil/cont.	>1500 V <sub>rms</sub>
Ambient temperature	-40...+70 °C
Packaging unit	25 pcs.

Retaining clip **ZG 28800**

View on solder pins

## ZG 78 753 Socket with solder terminals, 4 pole

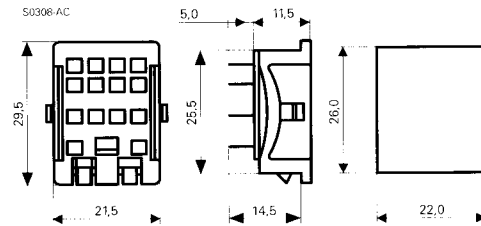



### Technical data

Rated current	5 A
Rated voltage	250 Vac
Dielectric strength coil/cont.	>1500 V <sub>rms</sub>
Ambient temperature	-40...+70 °C
Packaging unit	25 pcs.

Retaining clip **ZG 28 800**

Chassis cut-out

## ZG 78 759 Socket with PCB terminals, 2 pole

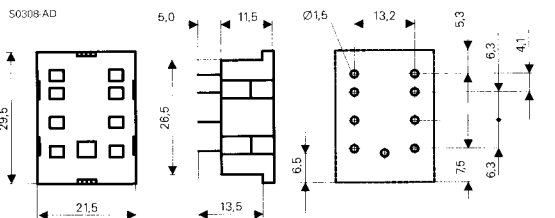

### Technical data

Rated current	5 A
Rated voltage	250 Vac
Dielectric strength coil/cont.	>1500 V <sub>rms</sub>
Ambient temperature	-40...+70 °C
Packaging unit	25 pcs.

Retaining clip **ZG 28 800**

View on solder pins

Dimensions in mm